



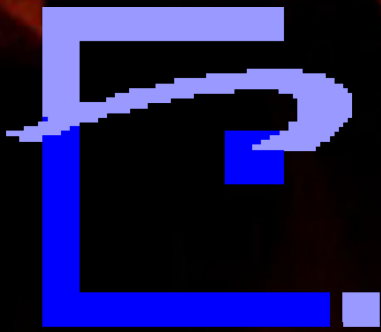


LUUID

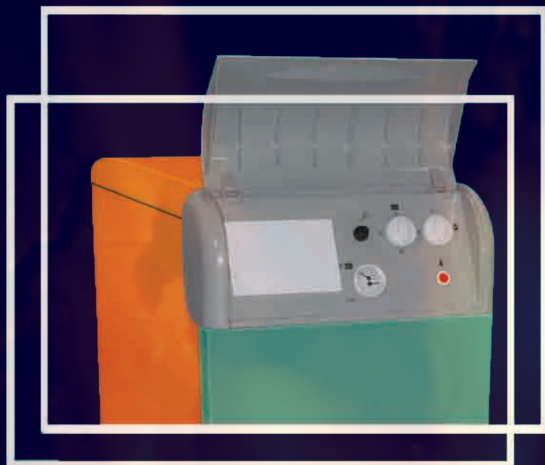

- FIVE YEARS WARRANTY ON CAST IRON BODY
- ASSEMBLED IN THREE BOXES

Dimensional Specification

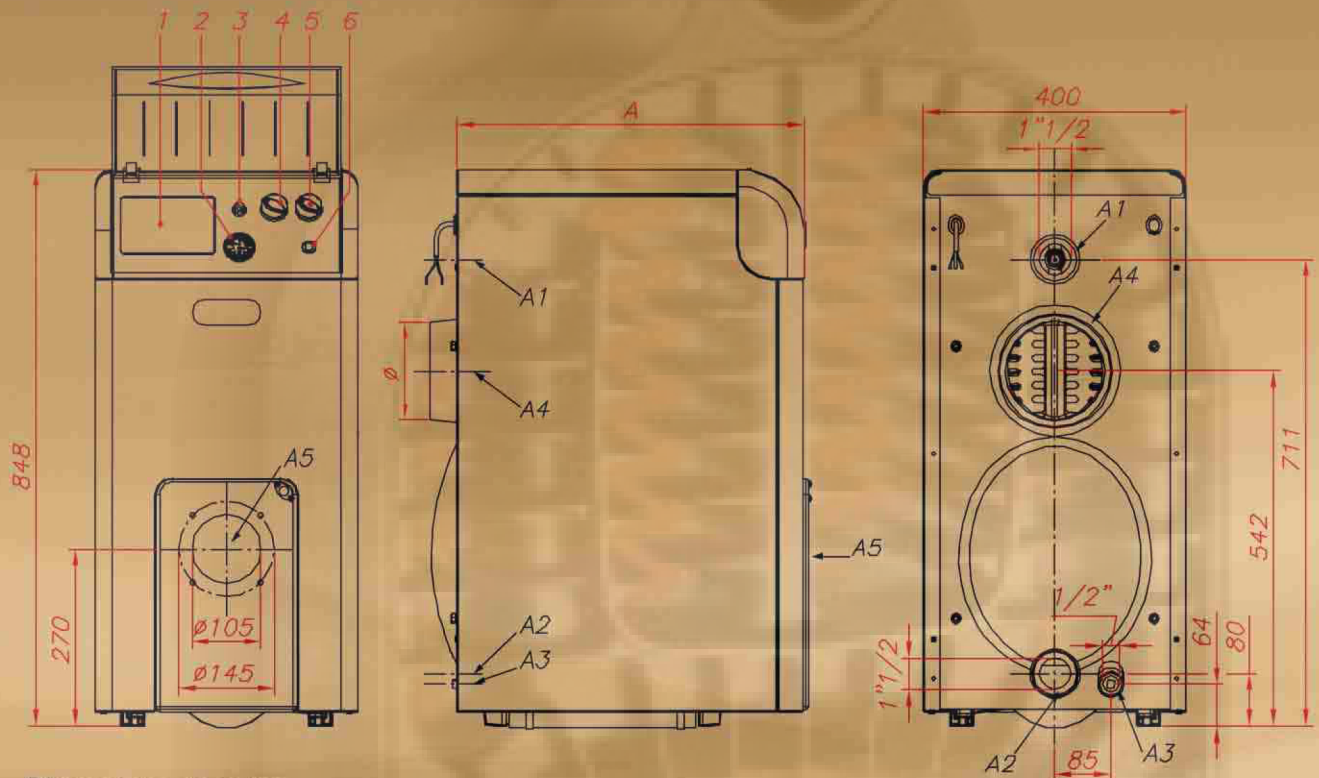

Dimensions are in mm

- 1- Place of installing the electronic control panel
- 2- Pressure gauge-thermometer 120°C 4 bar
- 3- Limit thermostat 100°C
- 4- Adjustable thermostat (0-90°C)
- 5- On an off position button
- 6- Alert indicating light

- A1. Outflow of used hot water (1 1/2" pipe)
- A2. Return of used hot water (1 1/2" pipe)
- A3. Emergency release duct
- A4. Place of installing flue
- A5. Place of installing burner

Unit Model	Inlet Capacity			Outlet Capacity			No of Sections	Volume Of water In boiler lit	Work Pressure bar	A Length Of Boiler mm	Dia. Of Flue mm	Fall of Pressure In Combustion chamber ΔP mbar	Capacity of comb lit	Fall of water pressure For		Weight Kg
	Max Kcal/h	Kw	Min Kw	Max Kcal/h	Kw	Min Kw								Δt 10°C	Δt 20°C	
A10-02	22200	25.8	16.4	20000	23.3	15.0	2	11	4	328	150	0.2	12.00	1	-	115
A10-03	33300	38.7	16.4	30000	34.9	15.0	3	14	4	428	150	0.2	20.15	1.8	-	147
A10-04	44400	51.6	35.4	40000	46.5	32.5	4	17	4	528	150	0.2	28.21	4.2	1	179
A10-05	55500	64.5	44.2	50000	58.1	40.5	5	20	4	628	180	0.2	36.27	7.2	1.6	211
A10-06	66600	77.5	53.2	60000	69.8	48.8	6	23	4	728	180	0.2	52.39	11	2.3	243
A10-07	77700	90.4	62.0	70000	81.4	57.0	7	26	4	828	180	0.2	60.45	15	3.3	275
A10-08	88800	103.3	70.8	80000	93.0	65.0	8	29	4	928	180	0.2	68.51	20	4.5	307